


**NOTES:**

- A. TANK, 55 GAL CAPACITY, POLYTHYLENE, WITH HINGED TOP, SS HARDWARE, (3) 3/8" AND (1) 1" PVC BULKHEAD FITTINGS
- B. MIXER, P/N AA103A, 1,725 RPM, 1/4 HP 1/60/115, TEFC MOTOR, 1/2" X 30" SS SHAFT WITH 4" SS PROPELLER, MOUNTED TO MIXER STAND
- C. PUMP, DIAPHRAGM METERING, MANUAL ADJUSTMENT, WORM GEAR DRIVEN, MODEL NO. MF110C, MOTOR: 1/2 HP, 1,725 RPM, TEFC, 1/60/115-230 CAPACITY: 10 GPH, UP TO 300 PSI MATERIALS OF CONSTRUCTION: 316 SS WETTED END, NEOPRENE DIAPHRAGM AND VALVE SEATS
- D. PLATFORM, 32" X 48": 11 GA CS TOP, WITH 2" X 2" X 1/4" ANGLE LEGS, WITH FOOT PADS, INCL VERTICAL MIXER MOUNTING STAND, GREY ACRYLIC ENAMEL FINISH, P/N TF202
- E. ANCHOR BOLT PATTERN: (4) 1/2" HOLES ON 45.5" X 33.5" PATTERN
- F. SUCTION PIPING: ONE VALVE WITH 1/2" PVC Y-STRAINER, AND 3/8" PVC PIPING
- G. RELIEF VALVE AND PIPING: PRV: 316 SS, SET AT 300 PSI, 3/8" NYLON REINFORCED PVC TUBING RETURN LINE TO TANK
- H. TANK STOP, 4 REQ'D, 3" X 3" CS ANGLE
- I. INLET CONNECTION: 1" NPT BULKHEAD FITTING
- J. PUMP OUTLET CONNECTION: 3/8" NPT

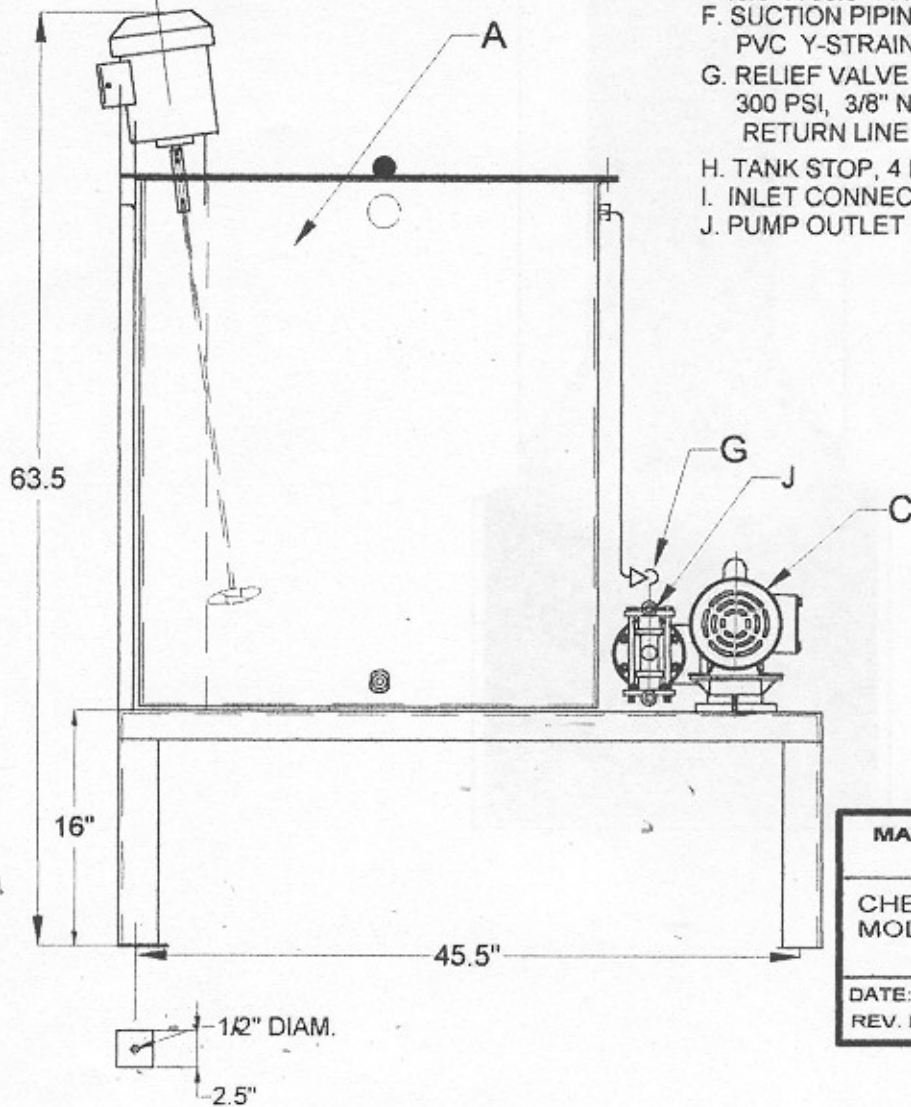

<b>MADDEN MANUFACTURING, INC.</b> ELKHART, IN	
<b>CHEMICAL FEED SYSTEM</b> MODEL NO. TE505	
DATE: 8/18/99	<b>XX</b>
REV. NO. 0	